

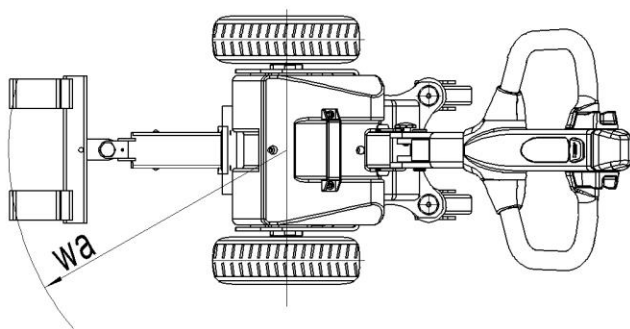


**T E10**

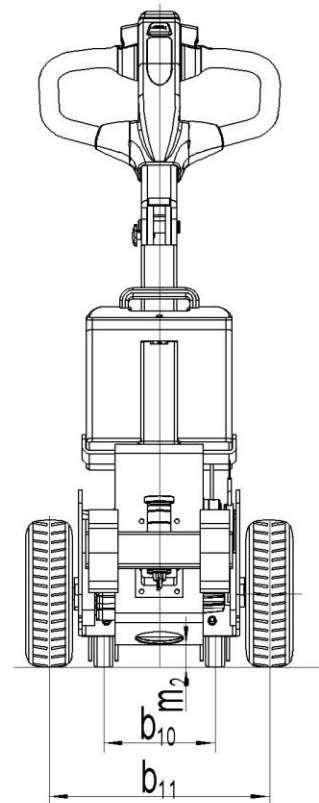

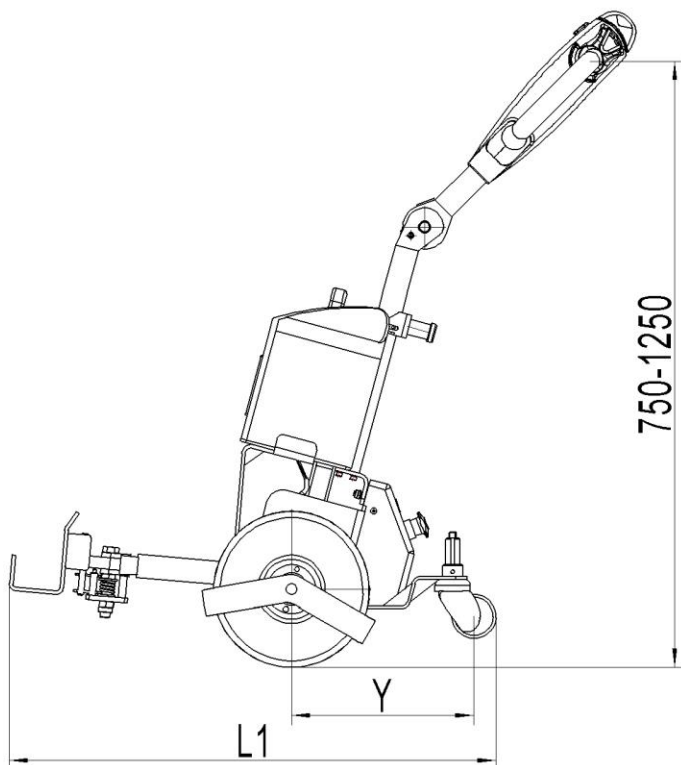

Type sheet for industrial tractor acc. to VDI 2198

|                     |      |                                               |                      |                   |
|---------------------|------|-----------------------------------------------|----------------------|-------------------|
| Distinguishing mark | 1.2  | Manufacturer's type designation               |                      | T E10             |
|                     | 1.3  | Power (battery ,diesel,petrol gas>manual)     |                      | Battery           |
|                     | 1.4  | Operator type                                 |                      | Pedestrian        |
|                     | 1.5  | Load Capacity / rated load                    | Q (t)                | 1.0               |
|                     | 1.7  | Rated drawbar pull                            | F (N)                | 200               |
|                     | 1.9  | Wheelbase                                     | Y (mm)               | 325               |
| Weight              | 2.1  | Service weight                                | kg                   | 62                |
|                     | 2.3  | Axle loading, unladen front/rear              | kg                   | 46/16             |
| Wheel chassis       | 3.1  | Tires                                         |                      | R+PU              |
|                     | 3.2  | Tire size, front                              | Ø x w (mm)           | Ø250X80           |
|                     | 3.3  | Tire size, rear                               | Ø x w (mm)           | Ø75X32            |
|                     | 3.5  | Wheels, number front/rear(x=driven wheels)    |                      | 2X+2/—            |
|                     | 3.6  | Tread, front                                  | b <sub>10</sub> (mm) | 185               |
|                     | 3.7  | Tread, rear                                   | b <sub>11</sub> (mm) | 380               |
| Tires, Chassis      | 4.9  | Height of tiller in drive position min./ max. | h <sub>14</sub> (mm) | 750/1250          |
|                     | 4.19 | Overall length                                | l <sub>1</sub> (mm)  | 810               |
|                     | 4.21 | Overall width                                 | b <sub>1</sub> (mm)  | 490               |
|                     | 4.32 | Ground clearance, centre of wheelbase         | m <sub>2</sub> (mm)  | 38                |
|                     | 4.35 | Turning radius                                | Wa (mm)              | 475               |
| Performance data    | 5.1  | Travel speed, laden/ unladen                  | km/h                 | 4.2/4.5           |
|                     | 5.5  | Drawbar pull, laden/unladen                   | N                    | 200 /—            |
|                     | 5.6  | Max. drawbar pull, laden/unladen              | N                    | 450/—             |
|                     | 5.10 | Service brake                                 |                      | Electromagnetic   |
| E- Motor            | 6.1  | Drive motor rating S2 60min                   | kW                   | 0,3               |
|                     | 6.3  | Battery acc. to DIN 43531/ 35/ 36 A, B, C, no |                      | No                |
|                     | 6.4  | Battery voltage, nominal capacity K5          | V/Ah                 | 24/24             |
|                     | 6.5  | Battery weight                                | kg                   | 16                |
| Additional data     | 8.1  | Type of drive control                         |                      | DC- speed control |
|                     | 8.4  | sound level at driver's ear acc. to EN 12053  | dB(A)                | 62                |
|                     |      |                                               |                      |                   |
|                     |      |                                               |                      |                   |